

Dissassembly



1. Open the cover lock.
2. Open the cover and pull upwards.



3. Remove the cover.
4. Extract the retainer pulling out.



5. Release the twirler blade and support turning the blade lock 180°.
6. Once unlocked pull gently towards you.



7. Remove carefully to avoid cuts with the blade.
8. Remove the peel ejector pulling sideways.



9. Unscrew the securing knobs from the squeezing units.
10. Remove the upper securing knob.



11. Remove the lower securing knob.
12. Remove both squeezing units.



13. Remove the juice jug.
14. Remove the peel container.



15. Remove the juice container with its filter and tap.
16. Dismantle the juice filter from the juice container.



17. Release the tap by pressing its sides to loose the pins.



18. Remove completely the tap to clean it.

Assembly



1. Assemble the tap in the juice container pressing its sides and placing correctly the pins.
2. Make sure the tap is well fixed.



3. Place the filter in its correct position.
4. Place the juice container with its filter and tap in its right place making sure it is well fitted.



5. Place the peel container.
6. Place the juice jug.



7. Place the squeezing units.
8. Place the securing knobs in the squeezing units.




9. Tighten the securing knobs of the squeezing units.



10. Place the peel ejector inserting sideways in the pins.



11. Insert the twirler blade and support and place the security lock in disassembly position.

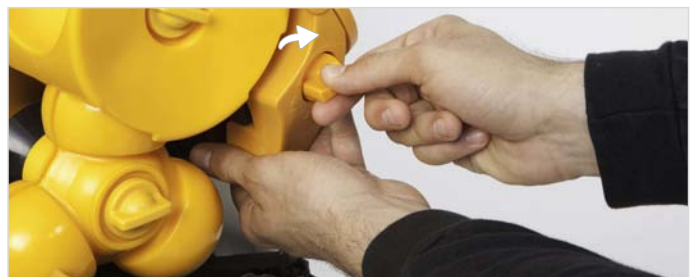

12. Turn the blade lock 180° to fasten the assembly.



13. Place the retainer in the axis, make sure it is correctly fitted can move smoothly.



14. Place the cover inserting the pins in the hinges.
15. Place the cover and lock it.